




HELIX IIHX02

TECHNICAL SUMMARY & NIJ DATA

THREAT LEVEL


II

STANDARD	NIJ 0101.06
NIJ MODEL	GPAII-2-F5
SERIES	HX02
THREAT LEVEL	II
GENDER	Female
AREAL DENSITY	0.78 psf
THINNESS	0.22"
PLY COUNT	27
SIZE RANGE	C1-C5
COMPOSITION	Kevlar®/Gold Shield®/ Spectra Shield® Hybrid
PANEL COVER	Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years

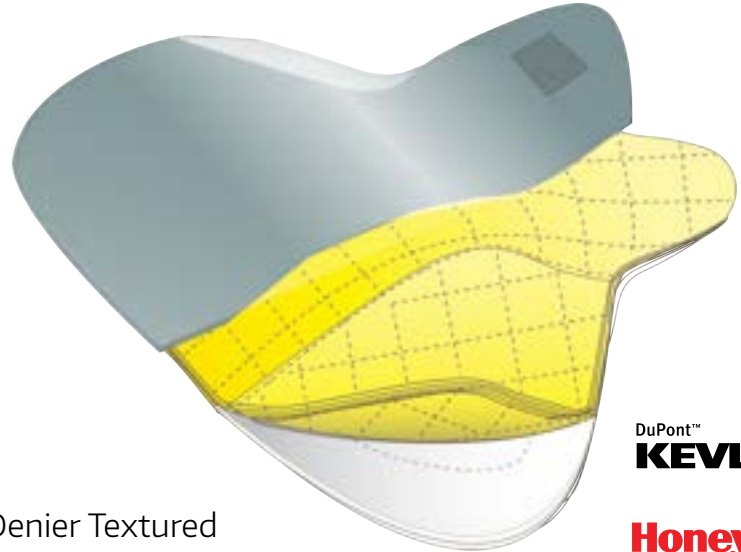

DuPont™
KEVLAR®

Honeywell



BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1726 fps	.357 Mag New V50	1688 fps
9mm Conditioned V50	1714 fps	.357 Mag Conditioned V50	1683 fps
9mm BFS	31.3 mm	.357 Mag BFS	34.2 mm
9mm New RPI	2213	.357 Mag New RPI	2164
9mm Conditioned RPI	2197	.357 Mag Conditioned RPI	2158

SPECIAL THREAT TESTING

9mm +P+ 127gr SXT (RA9TA) | .357 Sig 125gr GDHP

Special threat testing conducted at NIJ certified independent laboratory