


STANDARD	NIJ 0101.06
NIJ MODEL	GPAII-2
SERIES	HX02
THREAT LEVEL	II
GENDER	Neutral
AREAL DENSITY	0.78 psf
THINNESS	0.20"
PLY COUNT	29
SIZE RANGE	C1-C5
COMPOSITION	Kevlar®/Goldshield®/ Spectra Shield® Hybrid
STITCHING	Diamond Quilt, Shoulder Tack
PANEL COVER	Dual Covered, 2 Ply, 70 Denier Textured Nylon Ripstop with TPU Lamination System
DESICCANT	Patented ProTect® Material
WARRANTY	5 Years



DuPont™  
**KEVLAR®**

**Honeywell**

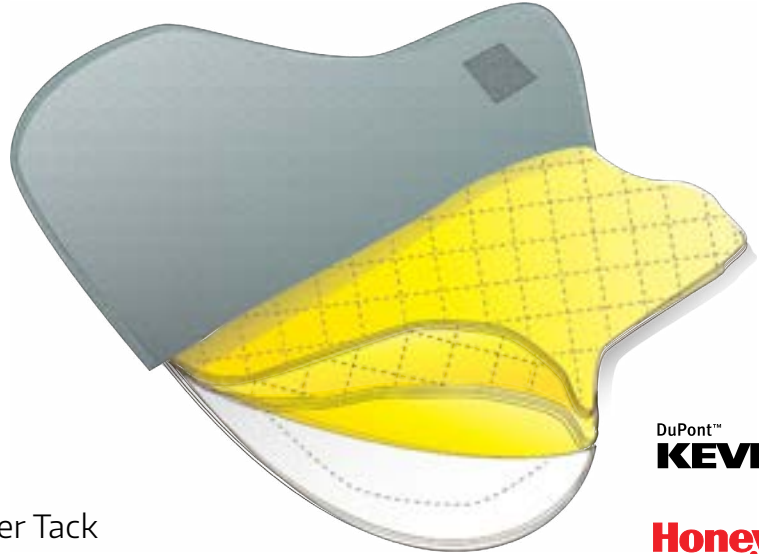

### BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1673 fps	.357 Mag New V50	1635 fps
9mm Conditioned V50	1573 fps	.357 Mag Conditioned V50	1659 fps
9mm BFS	34.2 mm	.357 Mag BFS	37.0 mm
9mm New RPI	2145	.357 Mag New RPI	2096
9mm Conditioned RPI	20177	.357 Mag Conditioned RPI	2127

### SPECIAL THREAT TESTING

9mm 127gr SXT +P+ RA9TA | .357 SIG 125gr GDHP

Special threat testing conducted at NIJ certified independent laboratory